


LINE Specification

Specification dated 2023-06-02

Equipment		ZS0607AC-Li
	Working height inside/outside	7,8 m/6,4 m
A	Platform height - folded out inside/outside	5,8 m/4,4 m
B	Platform height - folded	1,05 m
C	Platform length	1,65 m
D	Platform width	0,74 m
	Platform extension	0,91 m
E	Total height in the extended position	2,20 m
	Total height in the stowed position	1,79 m
F	Machine length	1,85 m
G	Machine width	0,76 m
H	Wheelbase	1,37 m
I	Stowed ground clearance	0,06 m
J	Ground clearance in extended position (skids folded out)	0,016 m
Efficiency		
	Permitted number of people on the platform inside/outside	2/1
	Maximum platform capacity	230 kg
	Maximum load capacity of the folded-out platform	113 kg
	Drive speed, stowed	4 km/h
	Drive speed in extended position	0,8 km/h
	Gradeability	25%
	Turning radius - inside / outside	0,1 / 1,6 m
	Maximum slope (horizontal / vertical)	1,5° / 3°
	Lifting / lowering speed	20/24 sec
	Control	proportional
	Wheels	32,3 cm x 10 cm
Power		
	Power source	160 Ah Li-ion battery
	Charger	24V / 30A
Weight		
	Total weight	1455 kg

Machine dimensions

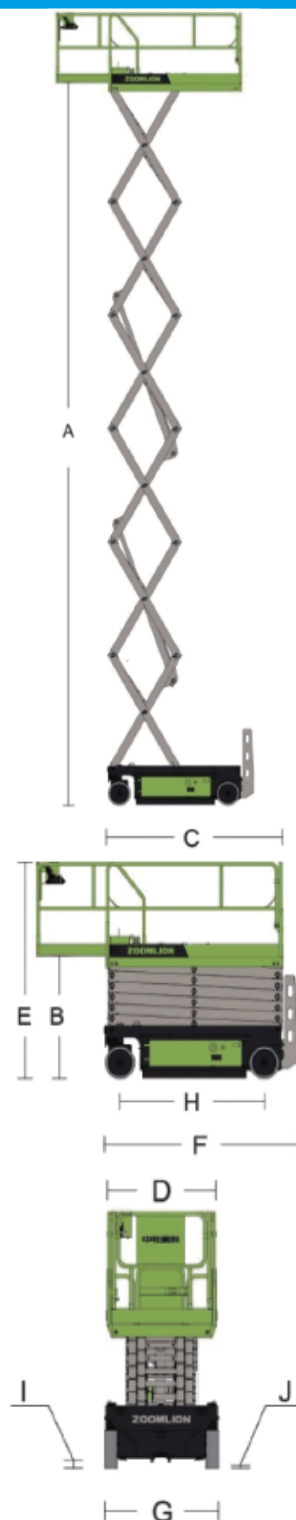

LINE Specification

Specification dated 2023-06-02

Standard equipment

- Battery management system (BMS)
- Proportional regulation
- All movements alarm
- Folding railings
- Self-closing entrance gate
- Emergency exit system
- Active pothole protection system
- Riding at full height possible
- A support for the maintenance of scissors
- Charging protection system
- Extendable platform (one way)
- Automatic braking system
- On-board diagnostics
- Emergency stop button
- Anti-tilt protection system
- Anti-tilt protection system
- Hour meter

Power

- Charger - 24 V/ 30 A
- 140 Ah Lithium-ion battery

Drive

- electric, two front wheels

Wheels

- full, cast, gray, non-marking

Optional accessories

- Pneumatic line brought to the platform
- Platform load sensor
- Work lights
- Audible signal of the working movements
- GPS positioning and tracking system
- Remote monitoring and rental management system

