

Electric scissor lift


Zoomlion ZS1212AC-Li



CLINE Specification

Specification dated 2023-06-02

	pment	ZS1212AC-Li
	Working height inside/outside	13,80 m/10 m
А	Platform height - folded out inside/outside	11,80 m/8 m
В	Platform height - folded	1,52 m
С	Platform length	2,30 m
D	Platform width	1,12 m
	Platform extension	0,91 m
E	Total height in the extended position	2,66 m
	Total height in the stowed position	2,13 m
F	Machine length	2,49 m
G	Machine width	1,15 m
Н	Wheelbase	1,85 m
I	Stowed ground clearance	0,11 m
J	Ground clearance in extended position (skids folded out)	0,02 m
ffici	ency	
	Permitted number of people on the platform inside/outside	3/1
	Maximum platform capacity	350 kg
	Maximum load capacity of the folded-out platform	113 kg
	Drive speed, stowed	4 km/h
	Drive speed, stowed Drive speed in extended position	_
		4 km/h
	Drive speed in extended position	4 km/h 0,8 km/h
	Drive speed in extended position Gradeability	4 km/h 0,8 km/h 25%
	Drive speed in extended position Gradeability Turning radius - inside / outside	4 km/h 0,8 km/h 25% 0,1 / 2,2 m
	Drive speed in extended position Gradeability Turning radius - inside / outside Maximum slope (horizontal / vertical)	4 km/h 0,8 km/h 25% 0,1 / 2,2 m 1,5° / 3°
	Drive speed in extended position Gradeability Turning radius - inside / outside Maximum slope (horizontal / vertical) Lifting / lowering speed	4 km/h 0,8 km/h 25% 0,1 / 2,2 m 1,5° / 3° 62/42 sec
owe	Drive speed in extended position Gradeability Turning radius - inside / outside Maximum slope (horizontal / vertical) Lifting / lowering speed Control Wheels	4 km/h 0,8 km/h 25% 0,1 / 2,2 m 1,5° / 3° 62/42 sec proportional
owe	Drive speed in extended position Gradeability Turning radius - inside / outside Maximum slope (horizontal / vertical) Lifting / lowering speed Control Wheels	4 km/h 0,8 km/h 25% 0,1 / 2,2 m 1,5° / 3° 62/42 sec proportional 38,1 cm x 12,7 cm
owe	Drive speed in extended position Gradeability Turning radius - inside / outside Maximum slope (horizontal / vertical) Lifting / lowering speed Control Wheels	4 km/h 0,8 km/h 25% 0,1 / 2,2 m 1,5° / 3° 62/42 sec proportional 38,1 cm x 12,7 cm

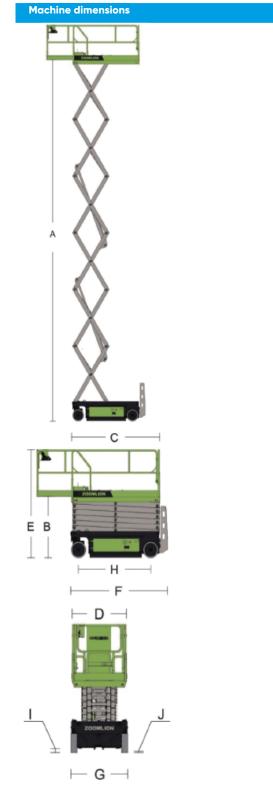





BIO DEGRADABLE





Contact: +48 697 300 300 www.liftstore.uk



Electric scissor lift

Zoomlion ZS1212AC-Li





PLINE Specification

Specification dated 2023-06-02

Standard equipment

- Battery management system (BMS)
- Proportional regulation
- All movements alarm
- Folding handrails
- Warning light
- Self-closing entrance gate
- Emergency exit system
- Active pothole protection system
- Roadway at full height
- A support for the maintenance of scissors
- Charging protection system
- Extendable platform (one way)
- Automatic braking system
- On-board diagnostics
- Emergency stop button
- Anti-tilt protection system
- Pockets for forklift lifting
- Hour meter

- Charger 24V / 30A, 24V / 60A
- 230 Ah lithium-ion battery

electric, two front wheels

full, cast, gray, non-marking

Optional accessories

- Pneumatic line brought to the platform
- AC power applied to the platform
- Load sensor
- Work lights on the platform
- Sound signal
- GPS positioning and tracking system
- Remote monitoring and rental management system









